


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS

(For All Applications Except 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow)

Excessive torque will damage and affect performance of cartridge.

Lubricate seals with recommended hydraulic fluid before installation.

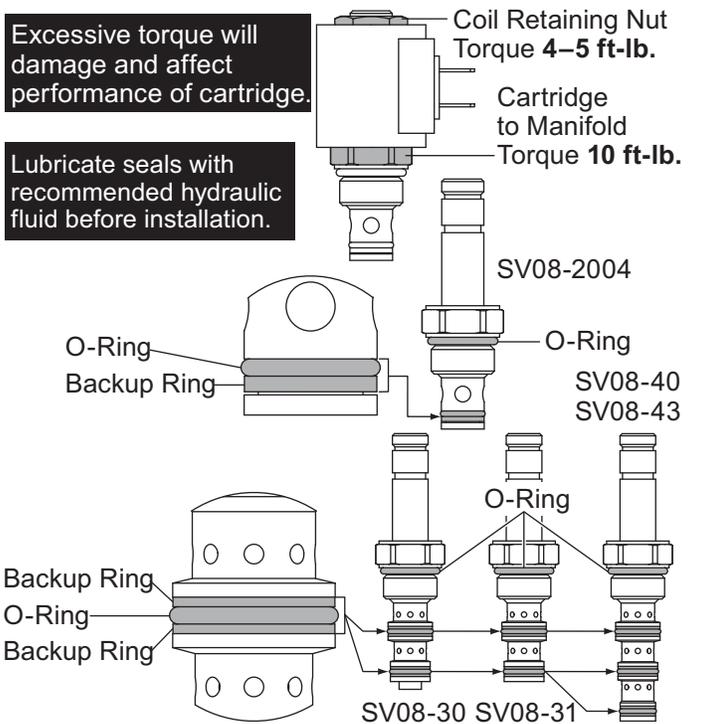


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS

(For All Applications Except 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow)

Excessive torque will damage and affect performance of cartridge.

Lubricate seals with recommended hydraulic fluid before installation.

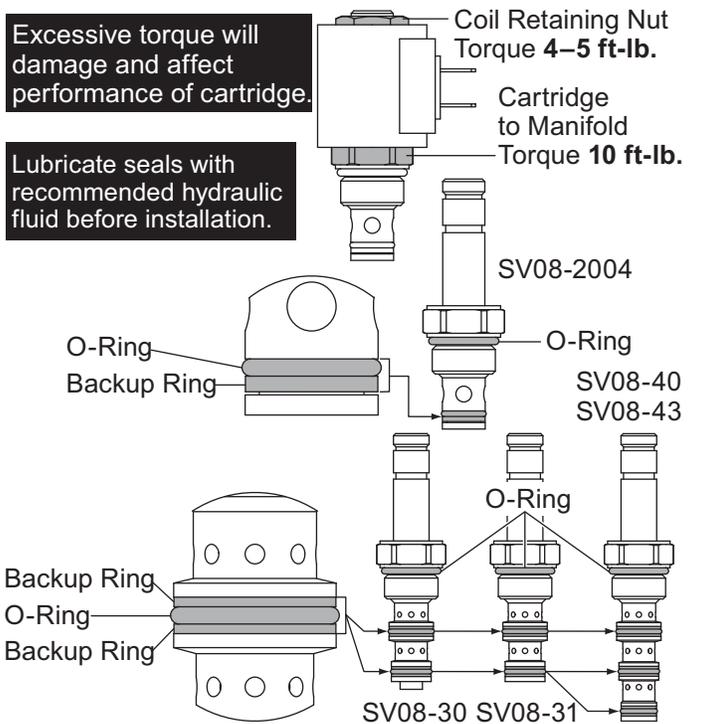


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS

(For All Applications Except 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow)

Excessive torque will damage and affect performance of cartridge.

Lubricate seals with recommended hydraulic fluid before installation.

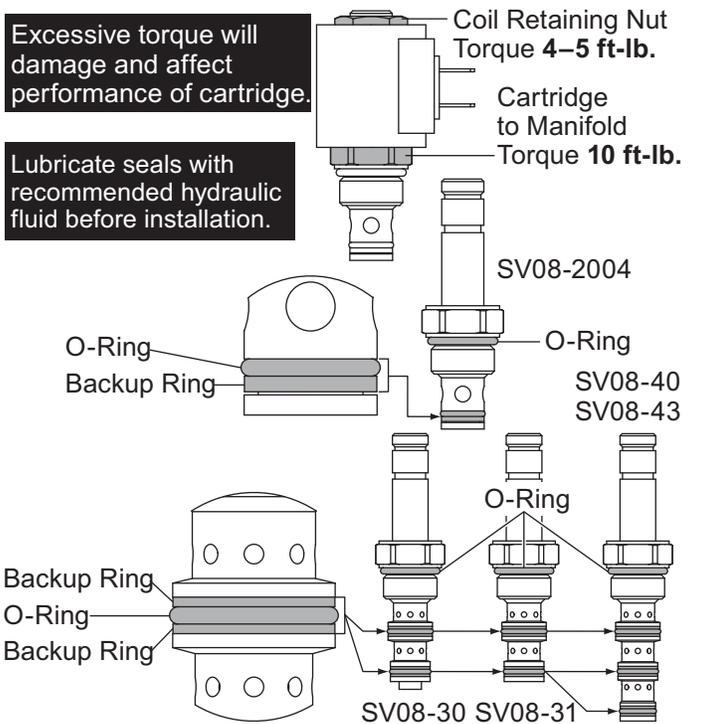


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS

(For All Applications Except 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow)

Excessive torque will damage and affect performance of cartridge.

Lubricate seals with recommended hydraulic fluid before installation.

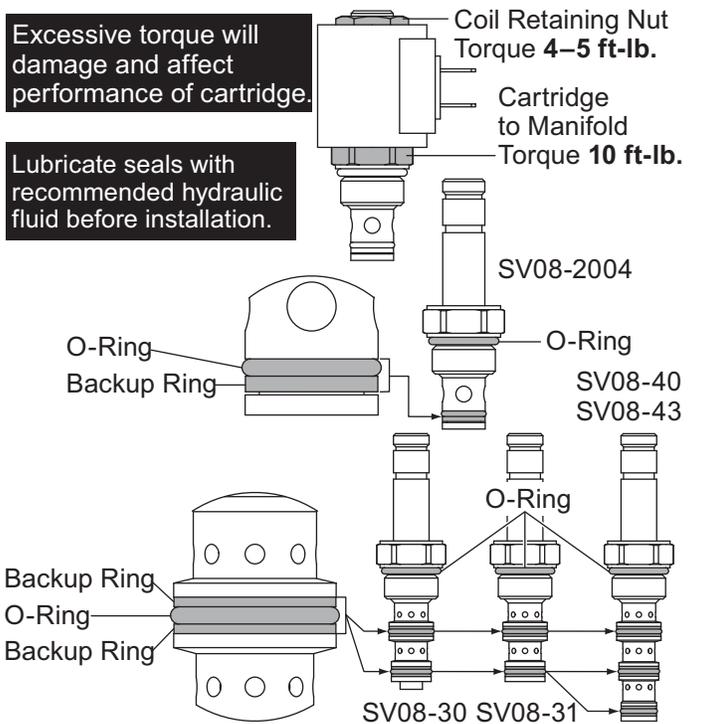


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS (For 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow Hydraulic Unit Only)

Excessive torque will damage and affect performance of cartridge.

Coil Retaining Nut
Torque 4–5 ft-lb.

Lubricate seals with recommended hydraulic fluid before installation.

Cartridge to Manifold
Torque 19–21 ft-lb.

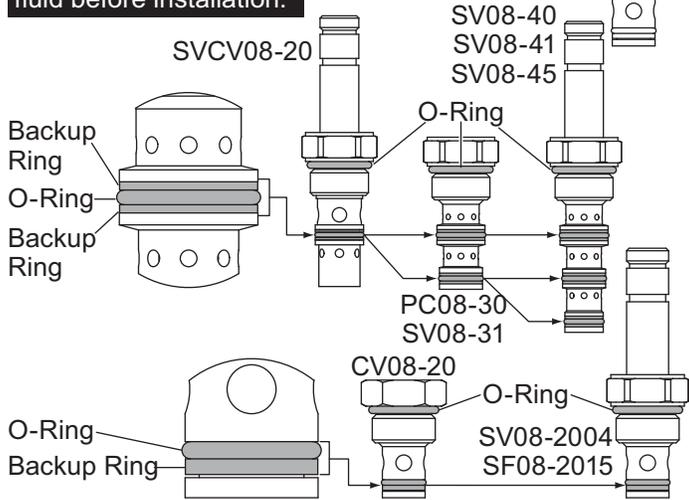

Lit. No. 13565, Rev. 05

Printed in U.S.A.

June 1, 2009


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS (For 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow Hydraulic Unit Only)

Excessive torque will damage and affect performance of cartridge.

Coil Retaining Nut
Torque 4–5 ft-lb.

Lubricate seals with recommended hydraulic fluid before installation.

Cartridge to Manifold
Torque 19–21 ft-lb.

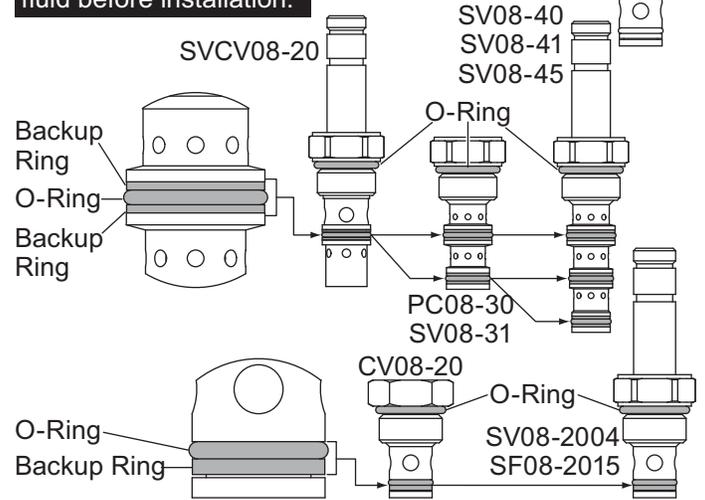

Lit. No. 13565, Rev. 05

Printed in U.S.A.

June 1, 2009


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS (For 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow Hydraulic Unit Only)

Excessive torque will damage and affect performance of cartridge.

Coil Retaining Nut
Torque 4–5 ft-lb.

Lubricate seals with recommended hydraulic fluid before installation.

Cartridge to Manifold
Torque 19–21 ft-lb.

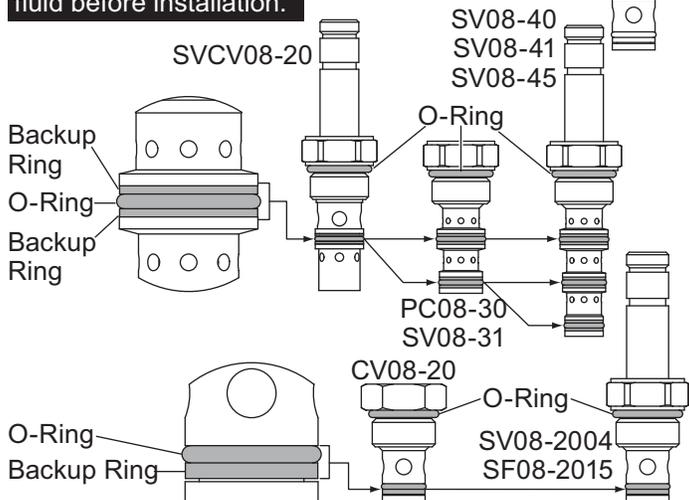

Lit. No. 13565, Rev. 05

Printed in U.S.A.

June 1, 2009


COIL/CARTRIDGE SEAL KIT INSTRUCTIONS (For 11-Valve V-Plow, MUX Straight Blade w/Scrape Lock and Adjustable-Winged Snowplow Hydraulic Unit Only)

Excessive torque will damage and affect performance of cartridge.

Coil Retaining Nut
Torque 4–5 ft-lb.

Lubricate seals with recommended hydraulic fluid before installation.

Cartridge to Manifold
Torque 19–21 ft-lb.

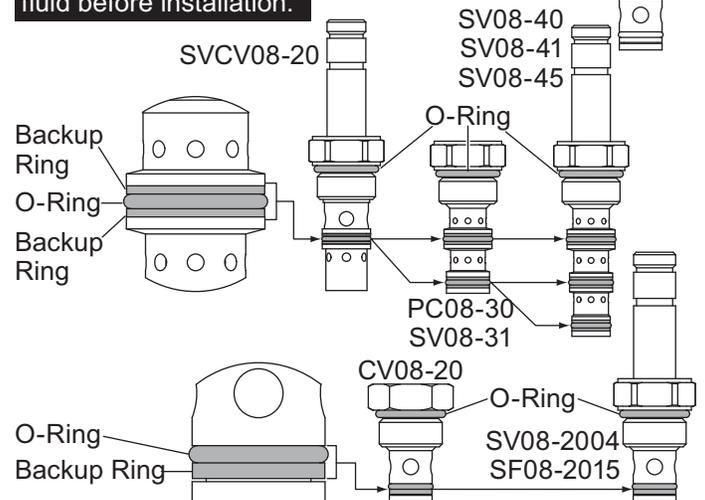

Lit. No. 13565, Rev. 05

Printed in U.S.A.

June 1, 2009