



WESTERN PRODUCTS
7777 N. 73rd St.
Milwaukee, Wisconsin 53223
(414) 354-2310




A DIVISION OF DOUGLAS DYNAMICS CORPORATION

A-Frame Stop Modification

For Additional Blade Lift

SUPPLEMENTAL INSTRUCTION

With snowplows mounted to vehicles having small tire size options, the blade lift may be less than desirable. If this condition exists on any installation, the height of blade lift can be increased by cutting and rewelding the A-frame stops on the mount as shown in the sketch below.

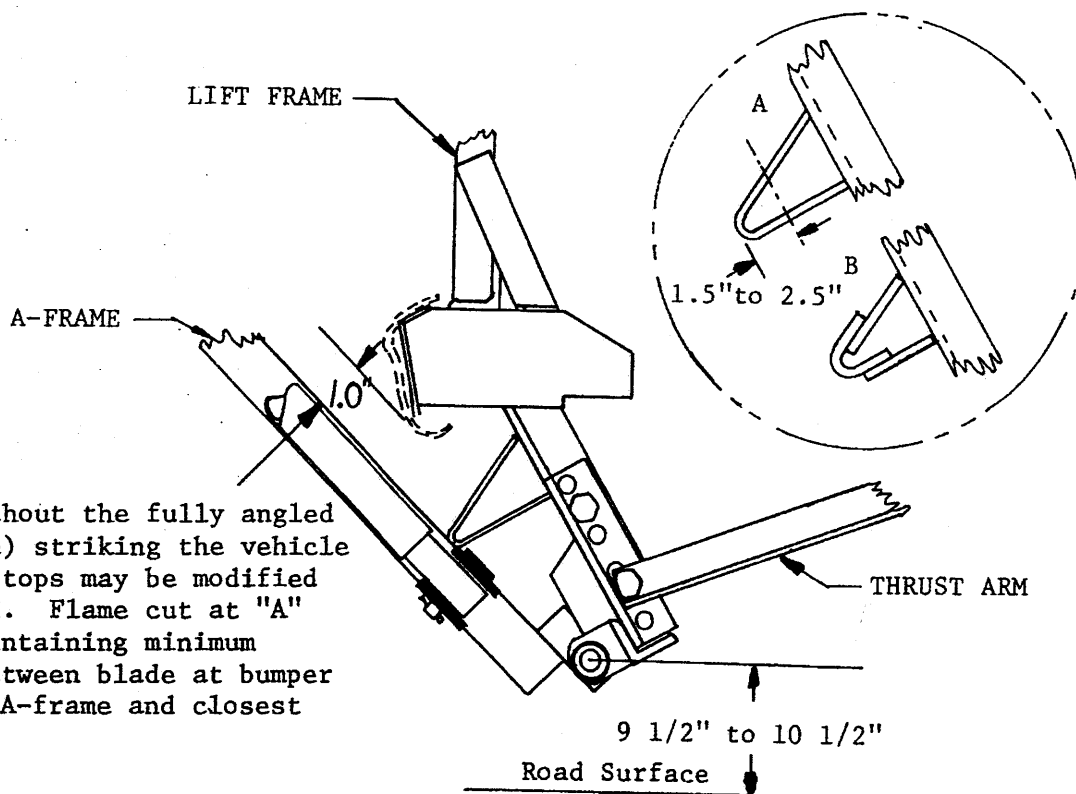

To gain max. lift without the fully angled blade (or the A-frame) striking the vehicle bumper, the A-frame stops may be modified as shown in the inset. Flame cut at "A" and reweld at "B" maintaining minimum 1.0 inch clearance between blade at bumper ends, and/or between A-frame and closest point of bumper.