


## INSTALLATION

This kit provides an aid for retaining the hopper spreader in the bed of a truck. Refer to the Regular and High Capacity Hopper Spreaders Installation Instructions for primary installation of the hopper spreader.


1. Remove one hook from each turn buckle assembly, thread one 3/8-16 nut onto each hook, replace the hook to the turnbuckle assembly.

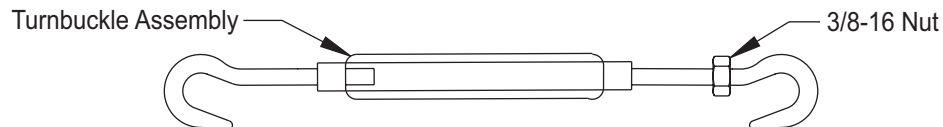

2. Attach the chain to the hold down eyelet of the hopper spreader with the link provided.
3. The hook placement will vary from truck to truck. If factory tie down eyelets are not available, eye bolts (not provided) must be installed.
4. Hook one end of the turnbuckle to the factory tie down or the eye bolt. Pull the chain tight and hook the other end of the turnbuckle to the chain.
5. Turn the center section of the turnbuckle to tension the chain. Tighten the 3/8 nut to lock the hooks in place.

### **⚠ CAUTION**

**Turnbuckles may loosen during use. Check the tension of the chain before each use of the spreader and after 25 miles.**

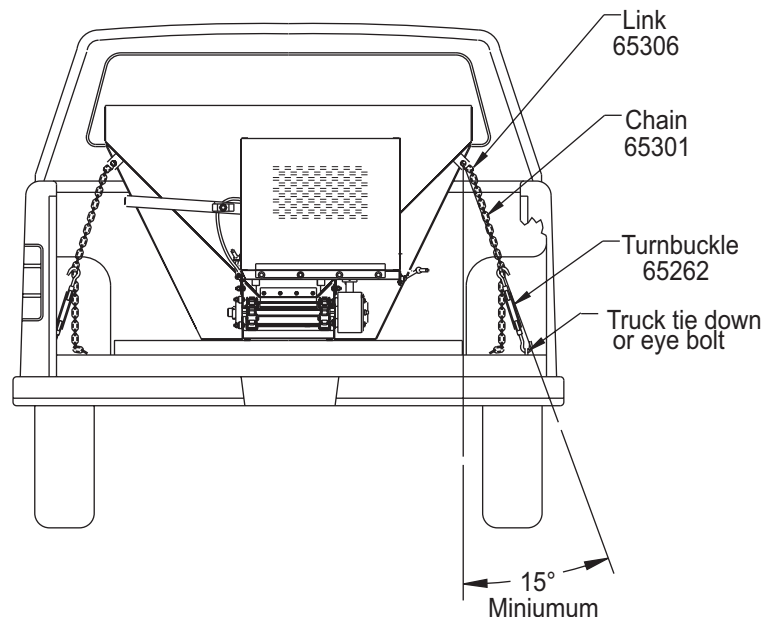

The company reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.