

FORM NO. 13684

May 1, 1999



UniMount^{SYSTEM}

RUBBER DEFLECTOR KIT INSTALLATION INSTRUCTIONS

Box No. 62123, 62124, 62220, 62530

⚠ CAUTION

See your WESTERN® outlet for application recommendations. The Selection List has specific vehicle and snowplow requirements.



RUBBER DEFLECTOR KIT INSTALLATION

INSTALLATION INSTRUCTIONS

1. Drill a 17/32" (.531) hole in each end of upper blade angle. (See Figure 1.)

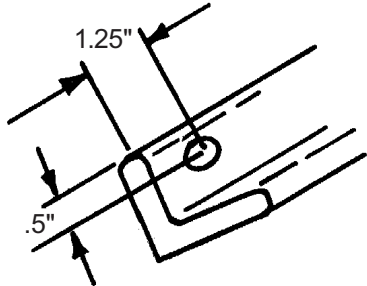


Figure 1

Location of Curl Brace Holes in Top Angle of Blade

2. Center deflector lengthwise on top of blade curl. If deflector is longer than the blade, cut off excess material from each end. If retainer bars are longer than blade, cut off the amounts from ends of two retainer bars as shown in Figure 2.
3. Center deflector lengthwise against blade curl. Align retainer bars, equally spaced, to the back edge of the blade curl. Align holes in bars with the holes in the deflector. Clamp in place.
4. Use three holes in each retainer bar as a guide to drill 5/16" holes through deflector and blade.

NOTE: To touch up paint around the holes drilled in blade curl and blade angle, use WESTERN® red paint part number 59515 (not included).

5. Except end holes, loosely attach deflector and retainer bars to blade curl with 5/16" x 1-1/4" bolts and locknuts.
6. Thread a 7/16" nut all the way onto each curl brace. Insert threaded end of curl braces into holes drilled into top angle of blade.
7. Position curl brace to bottom of blade curl. (See Figure 3.) Attach curl brace to each end hole of blade with a 5/16" x 1-3/4" bolt, flat washer, and locknut. Install flat washer to curl brace.


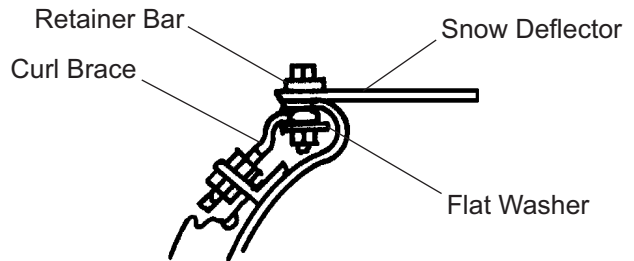


Figure 3

8. Tighten all 5/16" bolts. Run nuts on curl braces down against upper blade angle. Secure each curl brace with a second nut under blade angle.

Resizing 7-1/2' Retainer Bars



Resizing 8', 9', and 10' Retainer Bars




Figure 2



WESTERN PRODUCTS
7777 N. 73RD STREET
P.O. BOX 23045
MILWAUKEE, WI 53223-0045



A DIVISION OF DOUGLAS DYNAMICS, L.L.C.

Western Products reserves the right under its Product Improvement Policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein. Western Products and the vehicle manufacturer may require and/or recommend optional equipment for snow removal. Western Products offers a limited warranty on the snowplows and accessories. See separately printed page for this important information. The following are registered® and unregistered™ trademarks of Douglas Dynamics, L.L.C.: UNIMOUNT®, and WESTERN®.